


RoomPanel Datasheet

All-In-One Meeting Room Scheduling Panel

Romina. tresch@littlebit-group.com Littlet Romina. tresch@littlebit-group.com Litti Yealink RoomPanel is an 8-inch all-in-one meeting room schedule panel that runs Android 10.0 and comes with full RGB programmable LED background illumination for immediately visible communication of room status. It includes 10-point touch capability, 802.11ac Wi-Fi, Bluetooth 5.0, a built-in NFC/RFID reader, enhanced microphone arrays and speakers to meet all modern workspace demands. Also equipped with a Power-over-Ethernet and various mounting brackets, Yealink RoomPanel could be easily mounted on any surface.

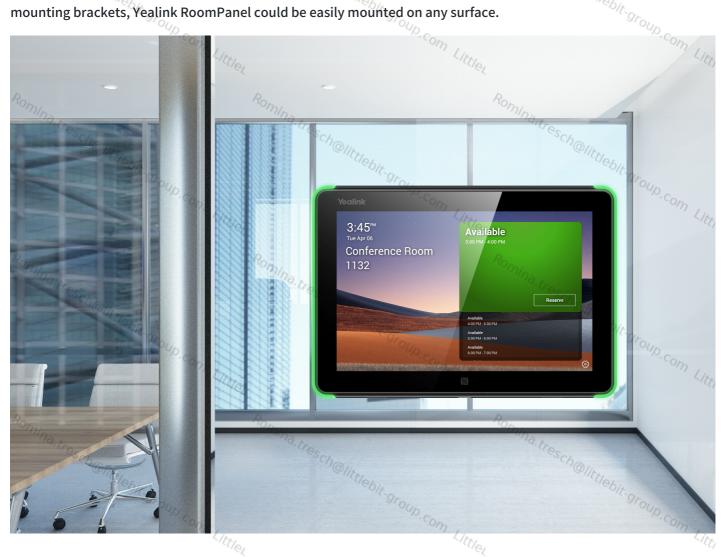

Key features and benefits

- 8-Inch 10-Point Interactive Panel: 10-Point touch capability screen to easily book rooms or check in/out on the RoomPanel.
- Anti-Fingerprint Screen: Keep the screen clean and free from fingerprints and oil stains.
- High Visibility LED Bars out Room Status: Full RGB LED bars for immediate all-around visible communication of room status.



- Ambient Light & Proximity Sensor Embedded: RFID & NFC Embedded Environment self-adaptation. Automatically adjust the screen brightness and automatically wake up the screen.
- Any Walls and Tilt Optional: Provide brackets and 3M velcro. Compatible with electrical box, glass and wood, Group, com Litti etc., with optional parallel or tilt angle.
- Orientation Optional: Easy to mount with portrait or landscape.
- PoE or DC Power: Minimalist and flexible installation, keep workspace tidy and modern.
- Remote Device Management: Easily monitor, manage, and diagnose by Yealink Management Cloud Server.
- 802.11ac Wi-Fi: Support wireless network deployment and anti-jamming Wi-Fi.
- Bluetooth 5.0: Directly connect to room sensors without extra gateways and support proximity features.
- RFID & NFC Embedded: Enhance ID authorization security and track meeting attendees.
- Actions with Occupancy Sensor: Actions with the room occupancy sensor, such as automatic release, automatic 40. com Littlel 10. COM Little 10. com Litti check-in, etc.

Specifications

Popul	Rom	
Parameter	Description Description	90
Basic Ch@//tt/	Operating System: Android 10	"Ch@littler
Basic Basic	Operating System: Android 10 · Size: 8" LCD Panel (16:10) · Resolution: 1280x800 · Contrast: 1000:1	esch@littlebit-group.com
Display Romina. tresch@littles	Contrast: 1000:1 · Viewing Angle(H/V): ±80°/±80°	-/17
	10 points capacitive multi-touch Anti-fingerprint Coating	2504
	Proximity Sensor: YesAmbient Light Sensor: Yes	n@littlebit
-Olf-Group, com	Ethernet: 1 x Fast Ethernet port (10/100 Mbps) Wi-Fi: 802.11a/b/g/n/ac Bluetooth: 5.0	esch@littlebit-group.com
Connectivity	RFID/NFC: 13.56 MHz USB Port: 1 x USB-C port	
'd. treschous	· Button: 1 x Reset pinhole	²⁵ Ch@//*
Audio Connectivity Romina. trescholitileble. group. com	Microphone: 2 x Array MicrophonesSpeaker: 2 x 1 Watt Speakers	esch@litilebit-group.com
Power Supply	Power over Ethernet IEEE 802.3af)	LITE
Mounting Options	Surface mount for 2-gang US electrical box 20° tilt mount kit for wall or glass	
	Flush mount kit for wall or glass	^{zs} ch@little
Dimensions Dimensions	Power over Ethernet IEEE 802.3af) 12 V Power Adapter Surface mount for 2-gang US electrical box 20° tilt mount kit for wall or glass Flush mount kit for wall or glass Display size (mm): 209 x 146 (8.23" x 4.06") Weight: 0.53 Kg (1.168 lb)	Aplt-aroup.com